



NAME \_\_\_\_\_

DATE \_\_\_\_\_

## BUNDLE AND COUNT

Count the objects in bundles by using ones, tens and hundreds.

Example:

476 to 600


476, 477, 478, 479, 480, 490, 500, 600

Ones = 5


Tens = 2

Larger unit = 125.



Hundred = 1



Ones



Tens

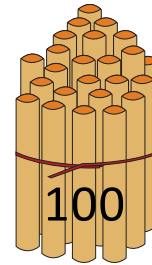

Hundreds

1) 47 to 200


47, \_\_, 49, 50, 60, \_\_, 80, \_\_, 100, 200.

Ones = \_\_


Tens = \_\_

Larger unit = \_\_\_\_.


Hundred = \_\_



Ones

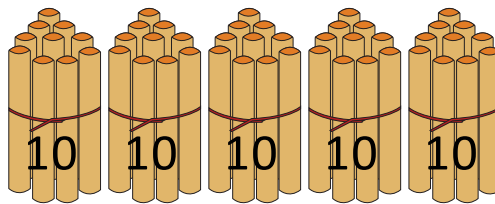

Tens

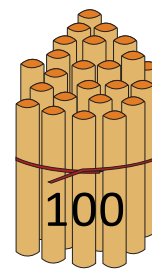

Hundreds